


FRAME CORE CHOKES

FEATURES

- Small size, low leakage flux due to OSQ core
- Low stray capacitance, High attenuation of a wide frequency band
- There is no danger of the layer short for the single-layer rolling
- High attenuation to the normal mode noise
- Winding time 90% down
- High inductance was achieved by the ferrite mixing and the baking technology that developed originally.
- Weight: approximately 13g

SPECIFICATION

- Rated Voltage: AC/DC 250V
- Operating Temperature Range: -40~120°C
- Withstanding Voltage: AC2000V 60sec. or AC2400V 1~2sec.(LINE to LINE)
- Insulation Resistance: DC500V, 100MΩmin.(LINE to LINE)

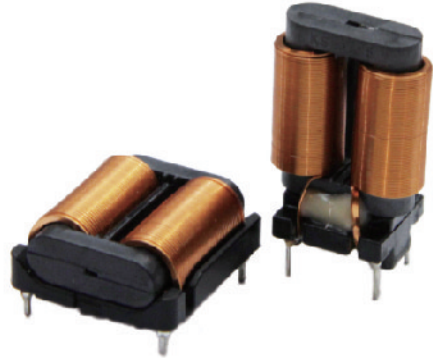


FACCF19 Series


L _R +30/-50%	mH	2.5	4	7.7	10	12
L _R typ	A	4	3	2	1.5	1.2
R _{typ}	mΩ	65	100	180	200	290
Ordering code		FACCF19H/V-04025	FACCF19H/V-03040	FACCF19H/V-02077	FACCF19H/V-1R5100	FACCF19H/V-1R2120

Rated inductance L_R : measured at 10kHz, 0.1 mA, 20°C


V-type

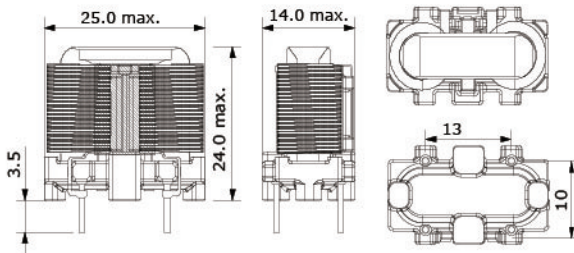

H-type

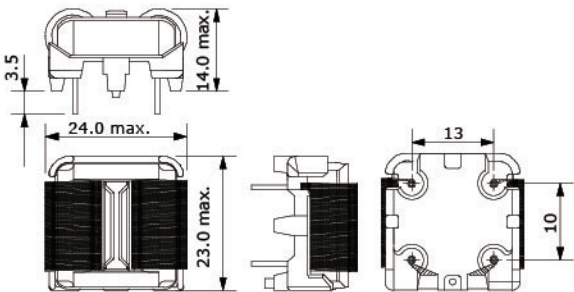

Frequency vs Impedance, Inductance
@HP4194A OSCLevel:0.1V

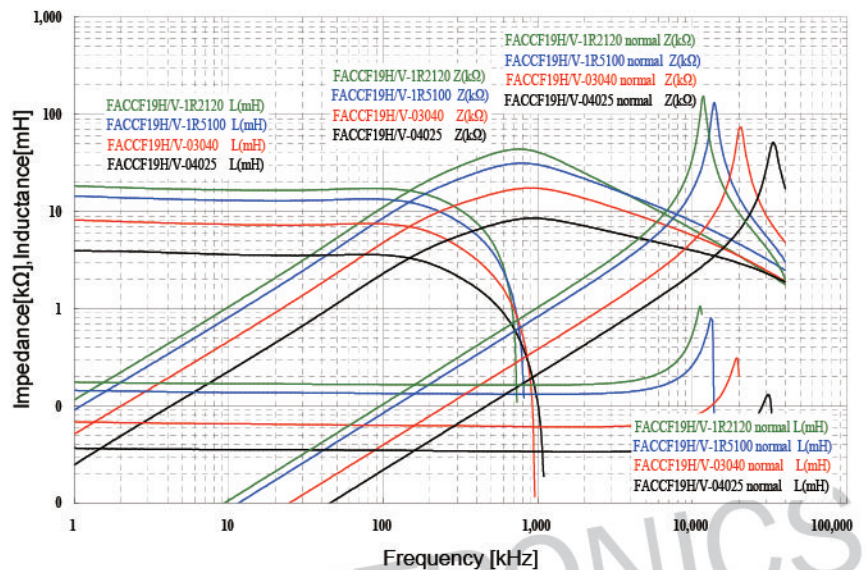

FUAN ELECTRONIC

EML: pairui007@fuantronics.com | TEL: +86 (514) 8769-3589 | WEB: www.fuantronics.net

