

# FRAME CORE CHOKES

## FEATURES

- Small size, low leakage flux due to OSQ core
- Low stray capacitance, High attenuation of a wide frequency band
- There is no danger of the layer short for the single-layer rolling
- High attenuation to the normal mode noise
- Winding time 90% down
- High inductance was achieved by the ferrite mixing and the baking technology that developed originally.
- Weight: approximately 18g

## SPECIFICATION

- Rated Voltage: AC/DC 250V
- Operating Temperature Range: -40~120°C
- Withstanding Voltage: AC2000V 60sec. or AC2400V 1~2sec.(LINE to LINE)
- Insulation Resistance: DC500V, 100MΩmin.(LINE to LINE)




## FACCF24 Series


L <sub>R</sub> +30/-50%	mH	6	9	12.2	20	30
L <sub>R</sub> typ	A	2.3	1.9	1.4	1.2	1.1
R <sub>typ</sub>	mΩ	110	170	200	370	450
Ordering code		FACCF24H/V -03060	FACCF24H/V -2R5090	FACCF24H/V -02122	FACCF24H/V -1R5200	FACCF24H/V -1R2300

Rated inductance L<sub>R</sub> : measured at 10kHz, 0.1 mA, 20°C


## V-type

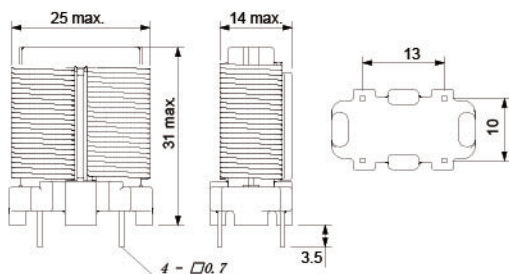

## H-type

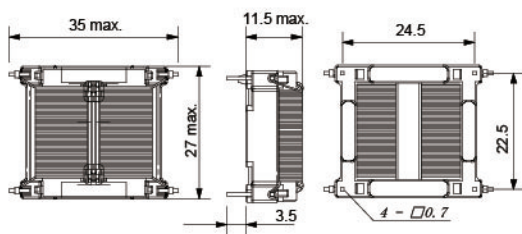

Frequency vs Impedance, Inductance  
@HP4194A OSCLevel:0.1V

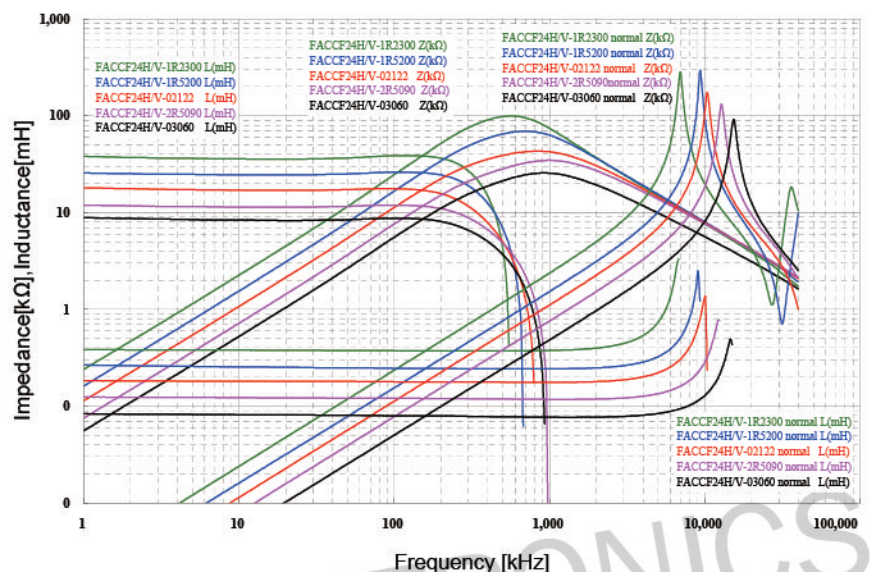

**FUAN ELECTRONIC**

EML: pairui007@fuantronics.com | TEL: +86 (514) 8769-3589 | WEB: www.fuantronics.net

